



CALYPSO


ULTRA-LOW-POWER ULTRASONIC WIRED MINI

WIND METER

User manual



English version 1.0
09.3.2023

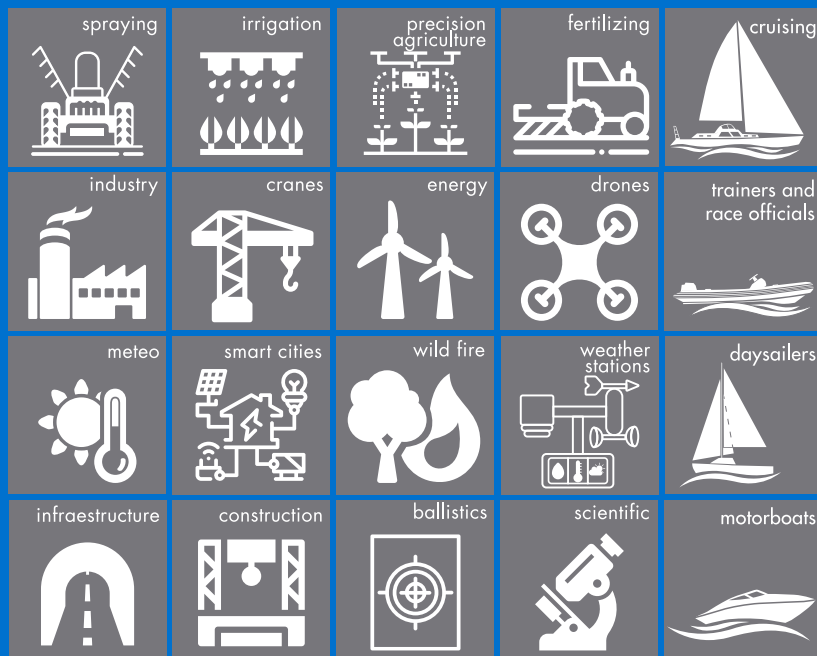

If you want to know more about our new ULP Ultrasonic Wired Mini wind meter, please keep reading or visit our website www.calypsoinstruments.com

Index

01	3	Brief description of product
02	3	Package Content
03	3	Technical Specifications
	3	Dimensions
	3	Weight
	3	Power
	4	Sensors
	5	Wind Information
	5	Firmware
	5	Product Material
	5	Quality Control
04	6	Configuration Options
05	7	Communication Protocols
06	7	General Information
	7	General Recommendations
	7	Maintenance and Repair
	7	Warranty

1 Product overview

Thank you for choosing the Ultra-Low-Power Ultrasonic Wired Mini wind meter from Calypso Instruments. This wind sensor is the first model of our generation II, representing an important technology breakthrough condensing an extensive R+D investment:

- We feel very proud to release a unit that requires under 0.4 mA of power at 5V, sampling at 1Hz.
- Different output options available: UART/I2C.

2 Package content

The package contains the following:

- ULP Wired Mini Wind Instrument plus 2 meter (6.5 ft) cable for connection.
- Serial number reference on the side of the packaging.
- A quick user guide on the back of the packaging and some more useful information for the customer.
- M4 screw (x3)




3 Technical specifications

The ULP Wired Mini has the following technical specifications:

Dimensions	· Diameter 43 mm (1.69 in.) · Height: 47 mm (1.85 in.)
-------------------	---

Weight	· 78 grams (2.75 oz.)
---------------	-----------------------

Power	· 3.3- 5 DCV
--------------	--------------

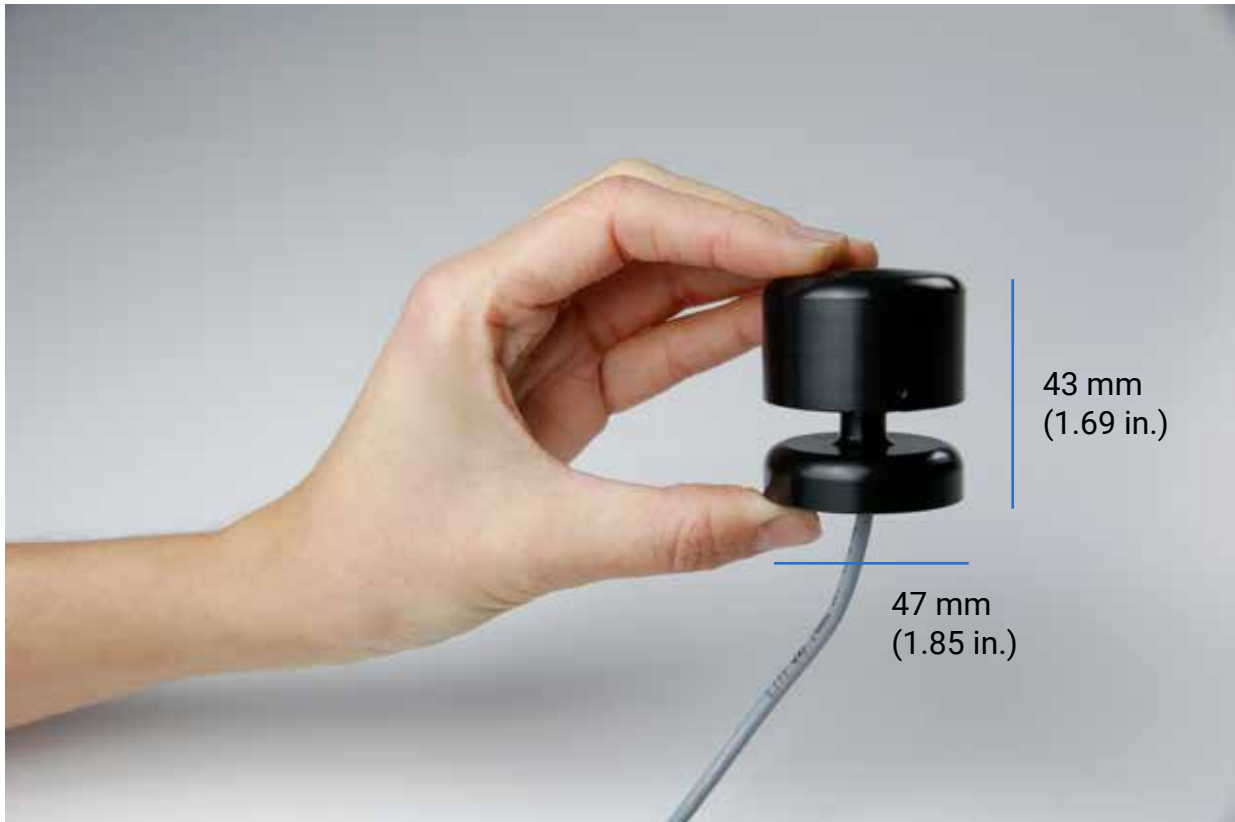

The ULP Wired Mini has to be connected as shown in this section.

White GND (Power -)	Yellow DATA Rx
Brown VCC (Power +)	Green DATA Tx

Data interface	1 Autotransmit 2-POLL telegram
Data format	UART
Baudrate	1,200 to 115,200 (8n1) bauds
Voltage range	3.3-5 VDC

Sensors

Ultrasonic transducers (4x)
Sample rate: 0.1 Hz to 10 Hz

The ULP Wired Mini has been designed to avoid any mechanical parts to maximize reliability and minimize maintenance.

The transducers communicate between themselves two by two using ultrasonic range waves. Each pair of transducers calculates the signal delay and get information about both wind direction and wind speed.

Wind Information	· Wind Speed	Range: 0.5 - 45 m/s or 0.5 - 25 m/s (1.12 to 56 mph or 1.12 to 100 mph)
		Accuracy: 0.1 m/s at 10 m/s (0.22 in. at 22 mph)
		Threshold: 1 m/s (2.24 mph)
	· Wind Direction	Range: 0 - 359°
		Accuracy: $\pm 1^\circ$
	-Sample Rate	1 Hz

It can be mounted either on a plate (inferior screws).

Easy mount - 3 x M4 base female tripod thread UNC 1/4" - 20

Mounting Instructions:

The ULP Wired Mini has a small circle on the outside of the main body which is called the north mark. The ULP Wired Mini should be mounted with the north mark facing the true north.

Firmware Upgradable via UART/TTL

Product Material

The ULP Wired Mini is engineered to be a robust device with minimal downtime. Frost, rain or snow might affect measurements if it blocks the wave path. The input wires are protected by Transient Voltage Suppression (TVS) diodes. The instrument body is built with Polyamide.

Quality Control

Every single unit is calibrated with accuracy, following the same calibration standards for each one in a wind tunnel.

A Q/C report for both wind speed and direction is generated and kept in our files. Standard deviation is checked to guarantee that each unit has been calibrated to the highest standards.

4 Configuration Options

The ULP Wired Mini can be set up by using a special configuration app made by Calypso Instruments.

In order to use the app, you should download the configurator from our website at www.calypsoinstruments.com.


To configure your device, connect the ULP Wired Mini via a USB to UART converter cable. Connect all the ULP cables except for the brown cable to the converter. Insert the USB into the computer, open the configurator app, select the configuration wanted and follow the instructions on the screen to finish the configuration. You will be prompted by the app to connect the brown wire at a specific moment of the configuration.

For more information, please watch the following video.

<https://bit.ly/3DuA7IM>

*USB converter cables available on calypsoinstruments.com

Baudrate: 2400 to 115200 (8n1) bauds
Output rate: 0.1 to 10 Hertz
Output units: m/sec., knots or km/h

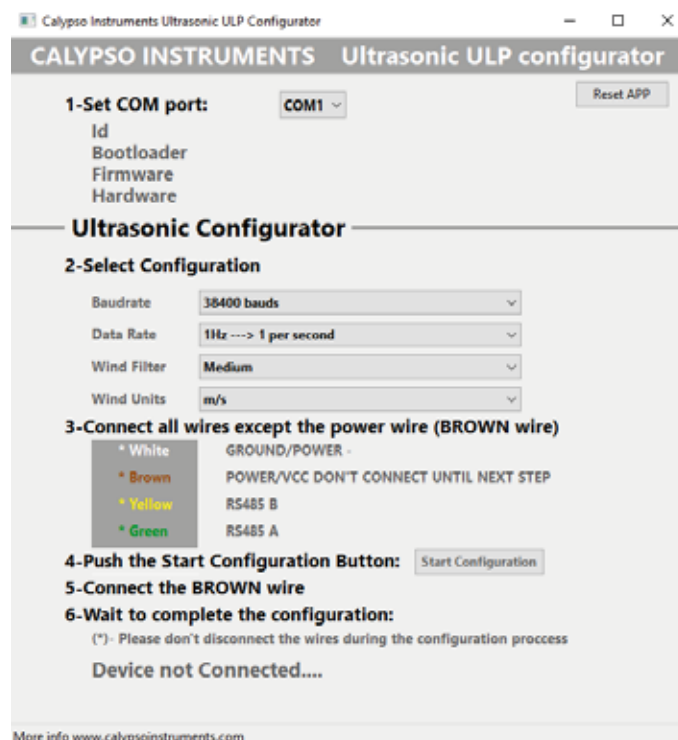

5 Communication Protocols

UART Sentences

MWV Wind Speed and Angle

1 2 3 4 5

||||

\$-MWV,x.x,a,x.x,a*hh

- 1) Wind Angle, 0 to 360 degrees
- 2) Reference, R = Relative, T = True
- 3) Wind Speed
- 4) Wind Speed Units, K/M/N
- 5) Status, A = Data Valid
- 6) Checksum

MWV Sentence 4800bps 8N1

6 General information

General recommendations

Regarding mounting the unit, align the north mark (the circle on the side) of the ULP Wired Mini towards the north. Make sure to install the sensor in a location **free from anything that obstructs the flow of wind to the sensors within a 2 meter radius.**

Maintenance and repair

The ULP Wired Mini does not require great maintenance thanks to the lack of the moving parts in this new design. Transducers must be kept clean and aligned. Impacts or incorrect impulsive handling may lead to transducers misalignment. The space around the transducers must be empty and clean. Dust, frost, water, etc... will make the unit stop working. The ULP Wired Mini can be wiped clean with a damp cloth being careful to not touch the transducers.

Warranty

This warranty covers the defects resulting from defective parts, materials and manufacturing, if such defects are revealed during the 24 months after the purchase date. Warranty is void in case of non-following the instructions of use, repair or maintenance without written authorisation.

Any wrongful use given by the user will not incur in any responsibility on part of Calypso Instruments. Therefore, any harm caused to the ULP Wired Mini by a mistake will not be covered by the warranty. Using assembly elements different from those delivered with the product will void the warranty. Changes on transducers position/alignment will void any warranty. For further information please contact Calypso Technical Support through aftersales@calypsoinstruments.com or visit www.calypsoinstruments.com.



Ultra-Low-Power Ultrasonic Wired Mini wind meter
User manual English version 1.0
07/03/2023